

LIVEN LVH Series

AGM (Absorbent Glass Material) technology with gas recombination. The LVH series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 15 years design life in float service. By using strong grids and specially designed active material is with lower I.R, lower self discharge rate, high power, and longer service life performance. Generally the LVH series offers 30% more power output than the standard range.

Application:

- High Power
- Alarm and security system
- Uninterrupted Power Supplies
- Communication power supply
- Datacenters
- DC power supply
- Emergency backup power supply
- Electric Tools

Dimensions:


Length	350±1mm (13.8 inches)
Width	167±1mm (6.57 inches)
Height	182±1mm (7.17 inches)
Total Height	182±1mm (7.17 inches)

Specification:

Cells Per Unit	6
Voltage Per Unit	12
Nominal Capacity	240W@15min-rate to 1.67V per cell @25°C
Weight	Approx. 21.0 Kg ±2%
Internal Resistance	Approx. 5.5 mΩ
Terminal	R6
Max. Discharge Current	650A (5 sec)
Design Life	15 years floating Eurobat (20°C): >12 years Very Long Life
Recommended Maximum Charging Current	19.5 A
Reference Capacity	C20 65.0AH
Standby Use Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -15°C~50°C Charge: -10°C~45°C Storage: -15°C~50°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	LIVEN Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



Drawing:

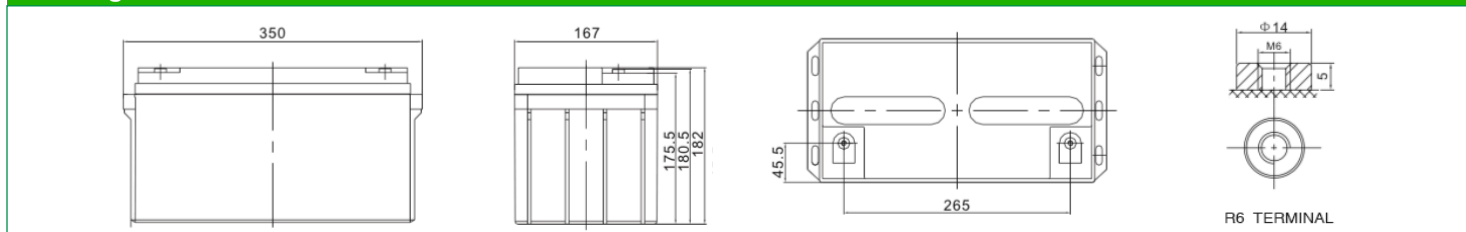


Constant Current Discharge (CC, Unit: A) at 25°C (77°F)

F.V/Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	229.8	196.8	177.0	140.6	112.9	82.8	47.6	35.2
1.67V	212.6	184.6	166.1	133.3	105.3	78.9	45.4	33.6
1.70V	203.8	178.1	160.0	129.2	101.3	76.7	44.1	32.5
1.75V	192.5	169.2	150.3	123.1	98.6	74.5	43.3	31.8
1.80V	181.0	160.3	140.5	116.9	95.6	72.2	42.5	31.0
1.85V	168.9	150.7	130.2	110.3	92.3	69.6	41.5	30.1


Constant Power Discharge (CP, Unit: W/Battery) at 25°C (77°F)

F.V/Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	2460.0	2136.0	1932.0	1542.0	1248.0	912.0	528.0	392.4
1.67V	2298.0	2022.0	1830.0	1476.0	1176.0	882.0	508.2	377.4
1.70V	2226.0	1974.0	1788.0	1452.0	1140.0	864.0	499.2	370.2
1.75V	2130.0	1902.0	1698.0	1398.0	1122.0	852.0	497.4	366.6
1.80V	2034.0	1824.0	1608.0	1350.0	1104.0	840.0	494.4	363.0
1.85V	1938.0	1752.0	1524.0	1296.0	1092.0	822.0	492.6	359.4


Discharge Characteristics Curve

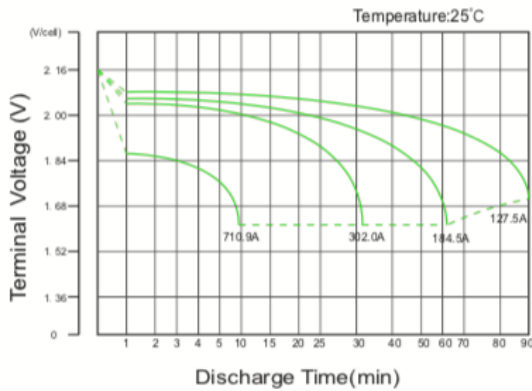


Charge Characteristic Curve For Standby Use

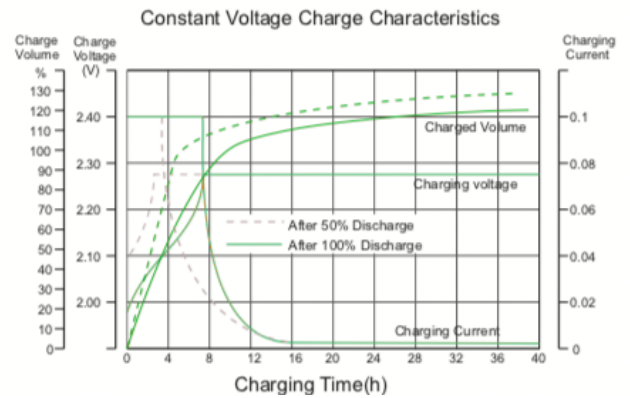


Cycle Life In Relation To Depth Of Discharge (up to 15')

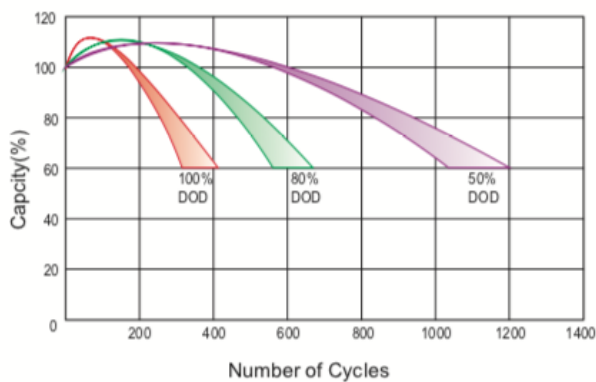


Relationship Between Charging Voltage And Temperature

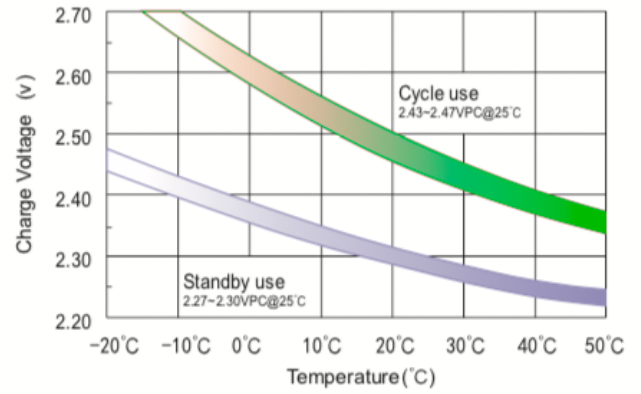


Temperature Effects On Capacity

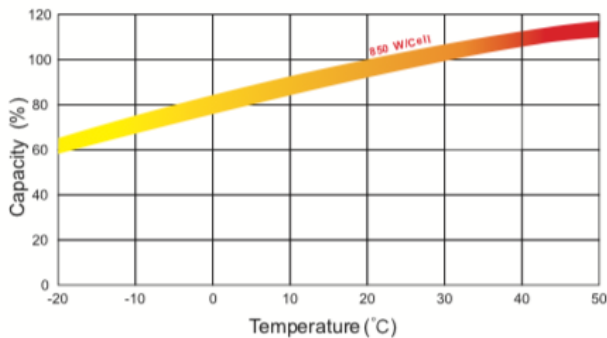

Storage Characteristics

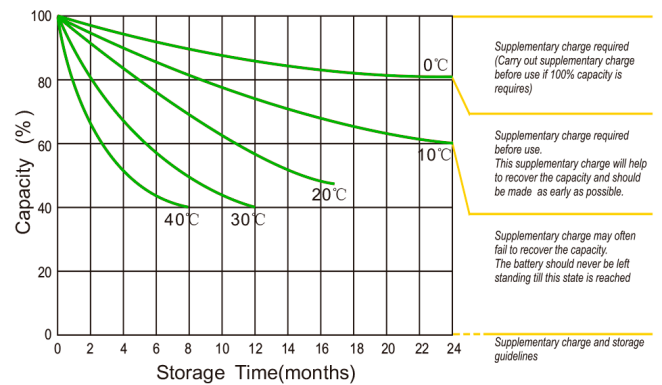

Effect Of Temperature On Long Term Life

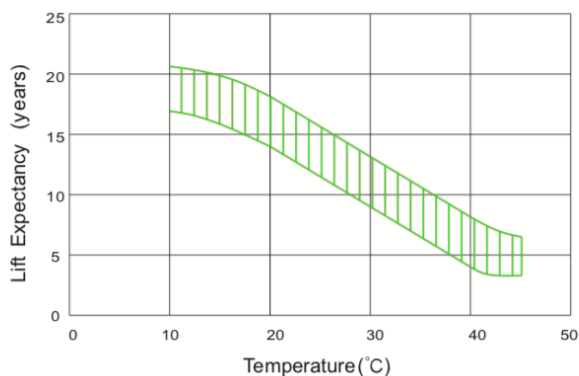

Life Characteristics Of Standby Use

